

**AIR JACK** pneumatic jacks consist of a high-strength diaphragm and an internal telescopic guide. They are equipped with a limit stop device and a safety valve that make them absolutely reliable in the event of overloading. Quiet, simple and lightweight, they are the ideal product for mechanical and Body repair shops.


## AIR JACK CAR 2T

Ref. 058323




## AIR JACK VAN 2T

Ref. 058330

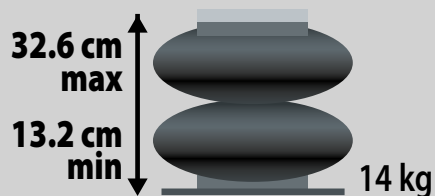

<b>Capacity</b>	2 Tons
<b>Net weight</b>	14 Kg
<b>Supply pressure</b>	8-10 bar
<b>Air consumption</b>	100 nl/min
<b>Max. stroke</b>	194 mm
<b>Min. height</b>	132 mm
<b>Number of pistons</b>	2

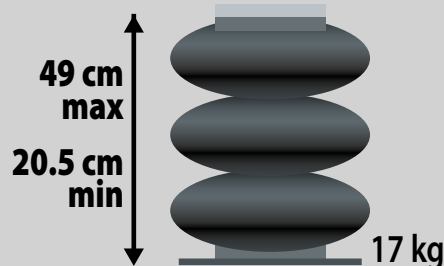

<b>Capacity</b>	2 Tons
<b>Net weight</b>	17 Kg
<b>Supply pressure</b>	8-10 bar
<b>Air consumption</b>	100 nl/min
<b>Max. stroke</b>	285 mm
<b>Min. height</b>	205 mm
<b>Number of pistons</b>	3